

# PowerSpin™ HX Centrifuge

Model: C8304

- POWERSPIN™ HX CENTRIFUGE
- FIXED SPEED 3400 RPM
- 12 PLACE FIXED ANGLE ROTOR
- 30 MIN. DIGITAL TIMER
- 6 X10ML CAPACITY
- POWER INPUT 110V




## Short Description

- POWERSPIN™ HX CENTRIFUGE
- FIXED SPEED 3400 RPM
- 12 PLACE FIXED ANGLE ROTOR
- 30 MIN. DIGITAL TIMER
- 6 X10ML CAPACITY
- POWER INPUT 110V

UNICO PowerSpin™ HX Series benchtop centrifuges are economical, reliable and super quiet available with horizontal or 12 place fixed angle rotors.

The horizontal rotor insures clean, complete separation of cellular components yielding a superior serum or plasma specimen. Using a horizontal rotor for spinning Serum Separator Tubes (SSTs) creates a tight uniform horizontal seal, reducing the risk of red cell leakage and possibility of specimen deterioration. This is especially important when the specimen is sent out for testing.

The PowerSpin™ HX features electronically controlled safety lock, so the lid can not be opened while the rotor is in motion. A digital timer and LCD display provide user with the precise control of the spin cycle. Powerful brushless motor is maintenance free for years of dependable use. Stainless steel guard bowl is easy to clean and maintain. The PowerSpin™ HXV features a Zero RPM safety lock, so the lid cannot be opened while the rotor is in motion. A digital timer and LCD display provide user with the precise control of the spin cycle.

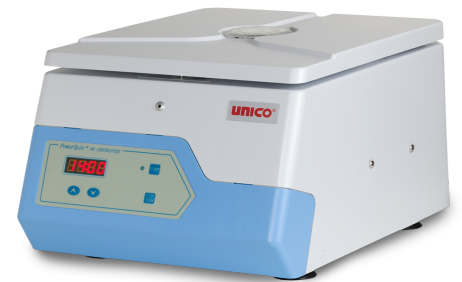



## ADDITIONAL INFORMATION

<b>TOP SELECTION</b>	No	
<b>ACCESSORIES</b>	<b>Accessories</b>	
	C8300-01	6 place horizontal rotor for HXV C8300 centrifuge
	C8300-02	8 place horizontal rotor for HXV C8300 centrifuge
	C8300-03	12 place angled rotor for HXV C8300 centrifuge
	C800-02	Regular tube shield, pack of 2
	C800-03	Adapter for short tubes, pack of 10
	C800-04	Pediatric or microtube adapter, pack of 2
	C800-05	Tube Lift Adapters, Pk/12
	C800-12	Balance Tube Holdster
<b>SPECIFICATION</b>	<b>Speed (RPM)</b>	3500
	<b>Maximum RCF (g)</b>	1777g
	<b>Timer</b>	Digital
	<b>Nominal Capacity</b>	12 x 15 ml
	<b>Rotor</b>	Fixed Angle
	<b>Lock</b>	ZERO RPM Digital



<b>Motor</b>	AC
<b>Maximum Test Tube Size</b>	16 x 110 mm

