
### accuc@ld

# **ARS6PV**

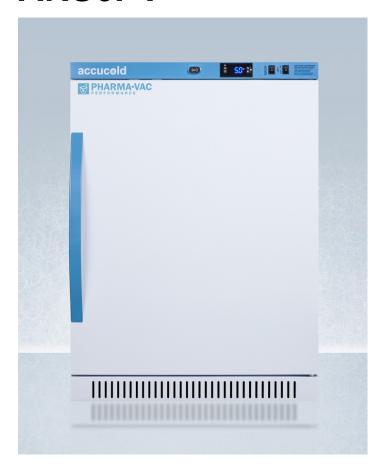

32.5" x 23.38" x 24.38" (H x W x D)

Performance series Pharma-Vac 6 cu.ft. freestanding ADA height all-refrigerator for vaccine storage, antimicrobial silver-ion handle, and hospital grade cord with 'green dot' plug

#### **Highlights:**

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

#### **Product Features:**

Purpose-built design	Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines	
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period	
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce the spread of germs	
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +8°C	
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range	
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)	
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup	
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment	
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)	



## accuc@ld

### **ARS6PV Specifications:**

Overview		
Nominal Height	33.0" (84 cm)	
Height of Cabinet	32.5" (83 cm)	
Nominal Width	24.0" (61 cm)	
Width	23.38" (59 cm)	
Width with Door Open	23.88" (61 cm)	
Nominal Depth	25.0" (64 cm)	
Depth	24.38" (62 cm)	
Depth with Handle	26.13" (66 cm)	
Depth with door at 90°	46.5" (118 cm)	
Capacity	6.0 cu.ft. (170 L)	
Defrost Type	Automatic	
Door	White	
Cabinet	White	
US Electrical Safety	ETL	
Canadian Electrical Safety	ETL-C	
Amps	0.75	
Voltage/Frequency	115 V AC/60 Hz	
Weight	115.0 lbs. (52 kg)	
Parts & Labor Warranty	2 Years	
Compressor Warranty	5 Years	
UPC	761101062556	
Refrigerator Features		
Door Swing	RHD	
Reversible	Yes	
Shelf Type	Wire	
Shelf Qty	4	
Adjustable Shelves	Yes	
Thermostat Type	Digital	
Fan Type	Interior	
Refrigerant Type	R600a	
Refrigerant Amount	1.66oz.	
Interior Light	Yes	
Temperature Range	2 to 8°C	
Sound Level	36.4 dB	
Dimensions		
Interior Height	24.5" (62 cm)	
Interior Width	20.0" (51 cm)	

Interior Depth	17.0" (43 cm)
Compressor Step Height	6.5" (17 cm)
Compressor Step Width	20.0" (51 cm)
Compressor Step Depth	5.0" (13 cm)

